



POS TS-201

Application Benefits :

Slim & Stylish Look

Improved reliability

Service & Upgrade with ease

Fits Various retail & hospitality environments





Black



White



TS-201

15" Ultra Wide LCD and Back light

True-Flat PCAP Touch

High speed Intel Processor

Fanless and Silent heat solution

Easy Swap HDD Lack type

Structure for easy maintenance

MSR/iButton for Identification

2nd Display and Customer Display

Specification

Processor	Intel® Celeron® J3455 (Apollo Lake)	Intel Core i3/i5/i7 (Kaby Lake)
Memory	DDR3L Standard 4GB (up to 8GB) Socket 1 x SODIMM	DDR4L Standard 4GB (up to 8GB) Socket 1 x SODIMM
HDD	2.5" SSD 128GB (up to 512GB)	
LCD	15.1" TFT LCD(Wide view) 1024*768 LED Backlight, 350 cd/m ² (typ.)	
Touch	10 Point Capacitive Touch, USB interface Full-window type	
OS	Windows 10 IoT / Linux	
Rear IO	1x DC-12V 4-pin Power Input Connector 1x VGA Port with Power out(12V) 1x Ethernet Port (Gigabit RJ45) 2x USB (2.0) Serial port -COM1~2 (D-SUB 9Pin 5V/12V by BIOS) COM3~4 (RJ45 with flow control, 5V/12V by BIOS) COM5 (RJ45 only RX/TX with 5V, Reserved for MSR with USB) 1x Audio Jack (Line-out)	
Back IO	4x USB (2.0) RJ11 For CR Port (Virtual Com port)	
Sound	1 x 0.8W (Mono), *option 2 x 0.8W (Stereo)	
Option	2nd Display : 9.7" TFT LCD (1024 x 768), RGB Interface, Optional Touchscreen VFD, 20 Columns x 2 Lines Identification Reader (3 Track-HID & i-Button) by USB	
Dimension	364mm(W) * 340mm(H) * 210mm(D)	
Certification	FCC, CE, KC	
Color	White, Black	
Power	60W Adaptor Input 100~240V/50~60Hz, Output DC 12V/5A	

Accessory (Option)



Dual Monitor





Customer Display



Identification Reader

Port

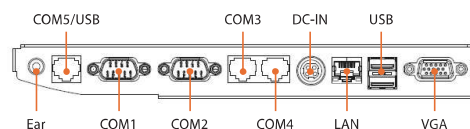

BST KOREA Co., Ltd.

Starwith Bdg, Unit 1011,
Heungan-daero 427 beon-gil 38
Dongan-gu, Anyang-si
Gyeonggi-do, Rep. of Korea

www.bstkr.com

sales@bstkr.com